


## PROTOLON(FL)-LWL (N)TSFLCGEWOEU 3,6/6 kV: medium voltage flat reeling cable with fibre-optics

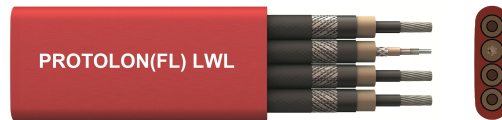

### Application

Flexible medium voltage reeling cable for high mechanical stresses (e.g. dynamic tensile loads, multiple changes of direction within one plane, running over rollers). Mainly for mobile equipment, e.g. fast-moving container cranes, cranes, large mobile equipment and excavators.

### Global data

Brand	PROTOLON(FL) LWL
Type designation	(N)TSFLCGEWOEU
Standard	Based on DIN VDE 0250-813

### Notes on installation

Notes on installation	Preparation of fibre-optics requires special skills and use of elaborate tools. It is therefore recommended that performance of this work is entrusted to our customer service (Factory assembly). Please provide the connection dimensions.
-----------------------	--


### Design features

Conductor	Electrolytic copper tinned, finely stranded, class F (refer also to DIN VDE 0295)																																								
Insulation	PROTOLON Special compound based on high-quality EPR (at least 3GI3); improved mechanical and electrical characteristics																																								
Electrical field control	Inner semiconductive layer of EPR, outer semiconductive layer of modified EPR, removable in warm condition																																								
Core identification	Natural coloured insulation with black semiconductive layer																																								
Optical Fiber	Fibre core diameter: 62.5, 50 or 9µm; diameter across the cladding: 125µm; diameter over the coating: 250µm. Design available with 6, 12, 18 or 24 fibres.																																								
	<table> <thead> <tr> <th>Fibre class:</th> <th>G50/125µm</th> <th>G62,5/125µm</th> <th>E9/125µm</th> </tr> <tr> <th>Type:</th> <td>Graded-index fibre</td> <td>Graded-index fibre</td> <td>Monomode fibre</td> </tr> </thead> <tbody> <tr> <td>- Attenuation at 850 nm:</td> <td>&lt;2,8 dB/km</td> <td>&lt;3,3 dB/km</td> <td>-</td> </tr> <tr> <td>- Attenuation at 1310 nm:</td> <td>&lt;0,8 dB/km</td> <td>&lt;0,9 dB/km</td> <td>&lt;0,4 dB/km</td> </tr> <tr> <td>- Attenuation at 1550 nm:</td> <td>-</td> <td>-</td> <td>&lt;0,3 dB/km</td> </tr> <tr> <td>- Bandwidth at 850 nm:</td> <td>&gt;400 MHz</td> <td>&gt;400 MHz</td> <td>-</td> </tr> <tr> <td>- Bandwidth at 1300 nm:</td> <td>&gt;1200 MHz</td> <td>&gt;600 MHz</td> <td>-</td> </tr> <tr> <td>- Numerical aperture:</td> <td>0,2 ± 0,02</td> <td>0,275 ± 0,02</td> <td>0,14 ± 0,02</td> </tr> <tr> <td>- Chromatic dispersion at 1300 nm:</td> <td>-</td> <td>-</td> <td>&lt;3,5 ps/nm km</td> </tr> <tr> <td>- Chromatic dispersion at 1550 nm:</td> <td>-</td> <td>-</td> <td>&lt;3,5 ps/nm km</td> </tr> </tbody> </table>	Fibre class:	G50/125µm	G62,5/125µm	E9/125µm	Type:	Graded-index fibre	Graded-index fibre	Monomode fibre	- Attenuation at 850 nm:	<2,8 dB/km	<3,3 dB/km	-	- Attenuation at 1310 nm:	<0,8 dB/km	<0,9 dB/km	<0,4 dB/km	- Attenuation at 1550 nm:	-	-	<0,3 dB/km	- Bandwidth at 850 nm:	>400 MHz	>400 MHz	-	- Bandwidth at 1300 nm:	>1200 MHz	>600 MHz	-	- Numerical aperture:	0,2 ± 0,02	0,275 ± 0,02	0,14 ± 0,02	- Chromatic dispersion at 1300 nm:	-	-	<3,5 ps/nm km	- Chromatic dispersion at 1550 nm:	-	-	<3,5 ps/nm km
Fibre class:	G50/125µm	G62,5/125µm	E9/125µm																																						
Type:	Graded-index fibre	Graded-index fibre	Monomode fibre																																						
- Attenuation at 850 nm:	<2,8 dB/km	<3,3 dB/km	-																																						
- Attenuation at 1310 nm:	<0,8 dB/km	<0,9 dB/km	<0,4 dB/km																																						
- Attenuation at 1550 nm:	-	-	<0,3 dB/km																																						
- Bandwidth at 850 nm:	>400 MHz	>400 MHz	-																																						
- Bandwidth at 1300 nm:	>1200 MHz	>600 MHz	-																																						
- Numerical aperture:	0,2 ± 0,02	0,275 ± 0,02	0,14 ± 0,02																																						
- Chromatic dispersion at 1300 nm:	-	-	<3,5 ps/nm km																																						
- Chromatic dispersion at 1550 nm:	-	-	<3,5 ps/nm km																																						
Fiber coding	Specially developed color code for identification of the individual fibres																																								
Fiber covering	Hollow core with filling compound, Basic material: ETFE, Compound: 7YI 1, Natural color																																								
Core arrangement	Parallel core arrangement; earth conductor splitted and concentrically distributed around each core. Optical Element: six tubes, laid up around a central support element, with one, two or three optical fibers in each.																																								
Sheath system	PROTOFIRM Special compound based on CR, quality at least 5GM5, red colour																																								
Marking	PROTOLON (FL) LWL (N)TSFLCGEWOEU (number of cores)x(cross-section) (rated voltage) (year of manufacture) (serial number)																																								

### Electrical parameters

Rated voltage	3.6/6 kV
Max. permissible operating voltage AC	4.2/7.2 kV
Max. permissible operating voltage DC	5.4/10.8 kV
AC test voltage	11 kV
Data transmission	Special design with fibre-optics for trouble free data transmission at high data rates
Current Carrying Capacity description	Acc. to DIN VDE 0298, Part 4 Higher values are permissible in specific cases (please consult the manufacturer).

## PROTOLON(FL)-LWL (N)TSFLCGEWOEU 3,6/6 kV: medium voltage flat reeling cable with fibre-optics

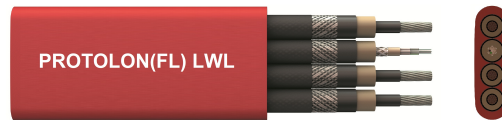

### Chemical parameters

Resistance to oil	Acc. to DIN EN 60811-404 and DIN VDE 0473-811-404, paragraph 10
Weather resistance	Unrestricted use outdoors and indoors, resistant to ozone, UV and moisture
Water resistance	Acc. to HD 2216

### Thermal parameters

Max. permissible temperature at conductor	90 °C
Max. short circuit temperature of the conductor	250 °C
Ambient temperature for fixed installation	min -50 °C ; max +80 °C
Ambient temperature in fully flexible operation	min -35 °C ; max +80 °C


### Mechanical parameters

Max. tensile load on the conductor	15 N/mm <sup>2</sup>
Torsional stress	Not allowed
Min. bending radius	Acc. to DIN VDE 0298, Part 3. (Recommendation: applied cable diameter D = 1.5 x height of the flat cable)
Min. distance with S-type directional changes	20 x D (cable diameter)
Travel speed	- Gantry (reeling operation): up to 120 m/min
Additional tests	Reversed bending test, reeling test

Number of cores x cross section	Part number	MLFB Number	Conductor diameter max. mm	Min. Height (for flat cable) mm	Max. Height (for flat cable) mm	Min. Width (for flat cable) mm	Max. Width (for flat cable) mm	Bending radius free moving min. mm	Weight (ca.) kg/km	Permissible tensile force max. N	Conductor resistance at 20°C max. Ω/km	Current carrying capacity, reeled in 1 layer (3) A	Short Circuit Current (conductor) kA
3x35+4x25/4E +1x(6G62,5)		5DK3...	8.3	24.5	27.5	83.5	88.5	413	3700	1575	0.57	130	5.01
3x50+4x25/4E +1x(6G62,5)	20015923	5DK3035	9.8	23.9	25.9	79.1	84.1	389	3890	2250	0.39	162	7.15
3x70+4x35/4E +1x(6G62,5)		5DK3...	11.4	28.7	31.7	97.7	102.7	476	5590	3150	0.28	200	10.01
3x95+4x50/4E +1x(6G62,5)		5DK3...	13.3	30.6	33.6	105.3	110.3	504	6720	4275	0.21	241	13.59

(3) Nominal current carrying capacity for rubber cables reeled in 1 layer, at 30°C ambient temperature (see also technical annexes). Design with 12, 18 or 24 fibers and/or G50 or E9 types available upon request.

## PROTOLON(FL)-LWL (N)TSFLCGEWOEU 6/10 kV: medium voltage flat reeling cable with fibre-optics

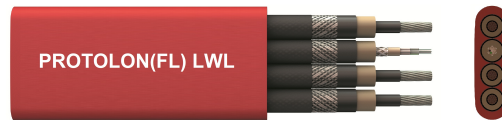

### Application

Flexible medium voltage reeling cable for high mechanical stresses (e.g. dynamic tensile loads, multiple changes of direction within one plane, running over rollers). Mainly for mobile equipment, e.g. fast-moving container cranes, cranes, large mobile equipment and excavators.

### Global data

Brand	PROTOLON(FL) LWL
Type designation	(N)TSFLCGEWOEU
Standard	Based on DIN VDE 0250-813

### Notes on installation

Notes on installation	Preparation of fibre-optics requires special skills and use of elaborate tools. It is therefore recommended that performance of this work is entrusted to our customer service (Factory assembly). Please provide the connection dimensions.
-----------------------	--

### Design features

Conductor	Electrolytic copper tinned, finely stranded, class F (refer also to DIN VDE 0295)																																								
Insulation	PROTOLON Special compound based on high-quality EPR (at least 3GI3); improved mechanical and electrical characteristics																																								
Electrical field control	Inner semiconductive layer of EPR, outer semiconductive layer of modified EPR, removable in warm condition																																								
Core identification	Natural coloured insulation with black semiconductive layer																																								
Optical Fiber	Fibre core diameter: 62.5, 50 or 9µm; diameter across the cladding: 125µm; diameter over the coating: 250µm. Design available with 6, 12, 18 or 24 fibres.																																								
	<table> <thead> <tr> <th>Fibre class:</th> <th>G50/125µm</th> <th>G62,5/125µm</th> <th>E9/125µm</th> </tr> <tr> <th>Type:</th> <td>Graded-index fibre</td> <td>Graded-index fibre</td> <td>Monomode fibre</td> </tr> </thead> <tbody> <tr> <td>- Attenuation at 850 nm:</td> <td>&lt;2,8 dB/km</td> <td>&lt;3,3 dB/km</td> <td>-</td> </tr> <tr> <td>- Attenuation at 1310 nm:</td> <td>&lt;0,8 dB/km</td> <td>&lt;0,9 dB/km</td> <td>&lt;0,4 dB/km</td> </tr> <tr> <td>- Attenuation at 1550 nm:</td> <td>-</td> <td>-</td> <td>&lt;0,3 dB/km</td> </tr> <tr> <td>- Bandwidth at 850 nm:</td> <td>&gt;400 MHz</td> <td>&gt;400 MHz</td> <td>-</td> </tr> <tr> <td>- Bandwidth at 1300 nm:</td> <td>&gt;1200 MHz</td> <td>&gt;600 MHz</td> <td>-</td> </tr> <tr> <td>- Numerical aperture:</td> <td>0,2 ± 0,02</td> <td>0,275 ± 0,02</td> <td>0,14 ± 0,02</td> </tr> <tr> <td>- Chromatic dispersion at 1300 nm:</td> <td>-</td> <td>-</td> <td>&lt;3,5 ps/nm km</td> </tr> <tr> <td>- Chromatic dispersion at 1550 nm:</td> <td>-</td> <td>-</td> <td>&lt;3,5 ps/nm km</td> </tr> </tbody> </table>	Fibre class:	G50/125µm	G62,5/125µm	E9/125µm	Type:	Graded-index fibre	Graded-index fibre	Monomode fibre	- Attenuation at 850 nm:	<2,8 dB/km	<3,3 dB/km	-	- Attenuation at 1310 nm:	<0,8 dB/km	<0,9 dB/km	<0,4 dB/km	- Attenuation at 1550 nm:	-	-	<0,3 dB/km	- Bandwidth at 850 nm:	>400 MHz	>400 MHz	-	- Bandwidth at 1300 nm:	>1200 MHz	>600 MHz	-	- Numerical aperture:	0,2 ± 0,02	0,275 ± 0,02	0,14 ± 0,02	- Chromatic dispersion at 1300 nm:	-	-	<3,5 ps/nm km	- Chromatic dispersion at 1550 nm:	-	-	<3,5 ps/nm km
Fibre class:	G50/125µm	G62,5/125µm	E9/125µm																																						
Type:	Graded-index fibre	Graded-index fibre	Monomode fibre																																						
- Attenuation at 850 nm:	<2,8 dB/km	<3,3 dB/km	-																																						
- Attenuation at 1310 nm:	<0,8 dB/km	<0,9 dB/km	<0,4 dB/km																																						
- Attenuation at 1550 nm:	-	-	<0,3 dB/km																																						
- Bandwidth at 850 nm:	>400 MHz	>400 MHz	-																																						
- Bandwidth at 1300 nm:	>1200 MHz	>600 MHz	-																																						
- Numerical aperture:	0,2 ± 0,02	0,275 ± 0,02	0,14 ± 0,02																																						
- Chromatic dispersion at 1300 nm:	-	-	<3,5 ps/nm km																																						
- Chromatic dispersion at 1550 nm:	-	-	<3,5 ps/nm km																																						
Fiber coding	Specially developed color code for identification of the individual fibres																																								
Fiber covering	Hollow core with filling compound, Basic material: ETFE, Compound: 7YI 1, Natural color																																								
Core arrangement	Parallel core arrangement; earth conductor splitted and concentrically distributed around each core. Optical Element: six tubes, laid up around a central support element, with one, two or three optical fibers in each.																																								
Sheath system	PROTOFIRM																																								
Marking	Special compound based on CR, quality at least 5GM5, red colour PROTOLON (FL) LWL (N)TSFLCGEWOEU (number of cores)x(cross-section) (rated voltage) (year of manufacture) (serial number)																																								

### Electrical parameters

Rated voltage	6/10 kV
Max. permissible operating voltage AC	6.9/12 kV
Max. permissible operating voltage DC	9/18 kV
AC test voltage	17 kV
Data transmission	Special design with fibre-optics for trouble free data transmission at high data rates
Current Carrying Capacity description	Acc. to DIN VDE 0298, Part 4 Higher values are permissible in specific cases (please consult the manufacturer).

## PROTOLON(FL)-LWL (N)TSFLCGEWOEU 6/10 kV: medium voltage flat reeling cable with fibre-optics



### Chemical parameters

Resistance to oil	Acc. to DIN EN 60811-404 and DIN VDE 0473-811-404, paragraph 10
Weather resistance	Unrestricted use outdoors and indoors, resistant to ozone, UV and moisture
Water resistance	Acc. to HD 2216

### Thermal parameters

Max. permissible temperature at conductor	90 °C
Max. short circuit temperature of the conductor	250 °C
Ambient temperature for fixed installation	min -50 °C ; max +80 °C
Ambient temperature in fully flexible operation	min -35 °C ; max +80 °C


### Mechanical parameters

Max. tensile load on the conductor	15 N/mm <sup>2</sup>
Torsional stress	Not allowed
Min. bending radius	Acc. to DIN VDE 0298, Part 3. (Recommendation: applied cable diameter D = 1.5 x height of the flat cable)
Min. distance with S-type directional changes	20 x D (cable diameter)
Travel speed	- Gantry (reeling operation): up to 120 m/min
Additional tests	Reversed bending test, reeling test

Number of cores x cross section	Part number	MLFB Number	Conductor diameter max. mm	Min. Height (for flat cable) mm	Max. Height (for flat cable) mm	Min. Width (for flat cable) mm	Max. Width (for flat cable) mm	Bending radius free moving min. mm	Weight (ca.) kg/km	Permissible tensile force max. N	Conductor resistance at 20°C max. Ω/km	Current carrying capacity, reeled in 1 layer (3) A	Short Circuit Current (conductor) kA
3x35+4x25/4E +1x(6G62,5)		5DK4254	8.3	25.3	28.3	86.7	91.7	425	3910	1575	0.57	130	5.01
3x50+4x25/4E +1x(6G62,5)	20024635	5DK4253	9.8	27.8	30.8	94.1	99.1	462	4810	2250	0.39	162	7.15
3x70+4x35/4E +1x(6G62,5)		5DK4...	11.4	29.5	32.5	100.9	105.9	488	5800	3150	0.28	200	10.01
3x95+4x50/4E +1x(6G62,5)	20165662	5DK4...	13.3	31.4	34.4	108.5	113.5	516	6940	4275	0.21	241	13.59

(3) Nominal current carrying capacity for rubber cables reeled in 1 layer, at 30°C ambient temperature (see also technical annexes). Design with 12, 18 or 24 fibers and/or G50 or E9 types available upon request.

## PROTOLON(FL)-LWL (N)TSFLCGEWOEU 8,7/15 kV: medium voltage flat reeling cable with fibre-optics

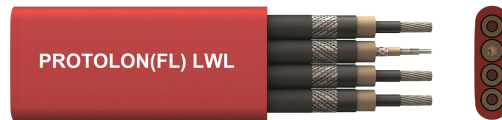

### Application

Flexible medium voltage reeling cable for high mechanical stresses (e.g. dynamic tensile loads, multiple changes of direction within one plane, running over rollers). Mainly for mobile equipment, e.g. fast-moving container cranes, cranes, large mobile equipment and excavators.

### Global data

Brand	PROTOLON(FL) LWL
Type designation	(N)TSFLCGEWOEU
Standard	Based on DIN VDE 0250-813

### Notes on installation

Notes on installation	Preparation of fibre-optics requires special skills and use of elaborate tools. It is therefore recommended that performance of this work is entrusted to our customer service (Factory assembly). Please provide the connection dimensions.
-----------------------	--

### Design features

Conductor	Electrolytic copper tinned, finely stranded, class F (refer also to DIN VDE 0295)																																								
Insulation	PROTOLON Special compound based on high-quality EPR (at least 3GI3); improved mechanical and electrical characteristics																																								
Electrical field control	Inner semiconductive layer of EPR, outer semiconductive layer of modified EPR, removable in warm condition																																								
Core identification	Natural coloured insulation with black semiconductive layer																																								
Optical Fiber	Fibre core diameter: 62.5, 50 or 9µm; diameter across the cladding: 125µm; diameter over the coating: 250µm. Design available with 6, 12, 18 or 24 fibres.																																								
	<table> <thead> <tr> <th>Fibre class:</th> <th>G50/125µm</th> <th>G62,5/125µm</th> <th>E9/125µm</th> </tr> <tr> <th>Type:</th> <td>Graded-index fibre</td> <td>Graded-index fibre</td> <td>Monomode fibre</td> </tr> </thead> <tbody> <tr> <td>- Attenuation at 850 nm:</td> <td>&lt;2,8 dB/km</td> <td>&lt;3,3 dB/km</td> <td>-</td> </tr> <tr> <td>- Attenuation at 1310 nm:</td> <td>&lt;0,8 dB/km</td> <td>&lt;0,9 dB/km</td> <td>&lt;0,4 dB/km</td> </tr> <tr> <td>- Attenuation at 1550 nm:</td> <td>-</td> <td>-</td> <td>&lt;0,3 dB/km</td> </tr> <tr> <td>- Bandwidth at 850 nm:</td> <td>&gt;400 MHz</td> <td>&gt;400 MHz</td> <td>-</td> </tr> <tr> <td>- Bandwidth at 1300 nm:</td> <td>&gt;1200 MHz</td> <td>&gt;600 MHz</td> <td>-</td> </tr> <tr> <td>- Numerical aperture:</td> <td>0,2 ± 0,02</td> <td>0,275 ± 0,02</td> <td>0,14 ± 0,02</td> </tr> <tr> <td>- Chromatic dispersion at 1300 nm:</td> <td>-</td> <td>-</td> <td>&lt;3,5 ps/nm km</td> </tr> <tr> <td>- Chromatic dispersion at 1550 nm:</td> <td>-</td> <td>-</td> <td>&lt;3,5 ps/nm km</td> </tr> </tbody> </table>	Fibre class:	G50/125µm	G62,5/125µm	E9/125µm	Type:	Graded-index fibre	Graded-index fibre	Monomode fibre	- Attenuation at 850 nm:	<2,8 dB/km	<3,3 dB/km	-	- Attenuation at 1310 nm:	<0,8 dB/km	<0,9 dB/km	<0,4 dB/km	- Attenuation at 1550 nm:	-	-	<0,3 dB/km	- Bandwidth at 850 nm:	>400 MHz	>400 MHz	-	- Bandwidth at 1300 nm:	>1200 MHz	>600 MHz	-	- Numerical aperture:	0,2 ± 0,02	0,275 ± 0,02	0,14 ± 0,02	- Chromatic dispersion at 1300 nm:	-	-	<3,5 ps/nm km	- Chromatic dispersion at 1550 nm:	-	-	<3,5 ps/nm km
Fibre class:	G50/125µm	G62,5/125µm	E9/125µm																																						
Type:	Graded-index fibre	Graded-index fibre	Monomode fibre																																						
- Attenuation at 850 nm:	<2,8 dB/km	<3,3 dB/km	-																																						
- Attenuation at 1310 nm:	<0,8 dB/km	<0,9 dB/km	<0,4 dB/km																																						
- Attenuation at 1550 nm:	-	-	<0,3 dB/km																																						
- Bandwidth at 850 nm:	>400 MHz	>400 MHz	-																																						
- Bandwidth at 1300 nm:	>1200 MHz	>600 MHz	-																																						
- Numerical aperture:	0,2 ± 0,02	0,275 ± 0,02	0,14 ± 0,02																																						
- Chromatic dispersion at 1300 nm:	-	-	<3,5 ps/nm km																																						
- Chromatic dispersion at 1550 nm:	-	-	<3,5 ps/nm km																																						
Fiber coding	Specially developed color code for identification of the individual fibres																																								
Fiber covering	Hollow core with filling compound, Basic material: ETFE, Compound: 7YI 1, Natural color																																								
Core arrangement	Parallel core arrangement; earth conductor splitted and concentrically distributed around each core. Optical Element: six tubes, laid up around a central support element, with one, two or three optical fibers in each.																																								
Sheath system	PROTOFIRM																																								
Marking	Special compound based on CR, quality at least 5GM5, red colour PROTOLON (FL) LWL (N)TSFLCGEWOEU (number of cores)x(cross-section) (rated voltage) (year of manufacture) (serial number)																																								

### Electrical parameters

Rated voltage	8.7/15 kV
Max. permissible operating voltage AC	10.4/18 kV
Max. permissible operating voltage DC	13.5/27 kV
AC test voltage	24 kV
Data transmission	Special design with fibre-optics for trouble free data transmission at high data rates
Current Carrying Capacity description	Acc. to DIN VDE 0298, Part 4 Higher values are permissible in specific cases (please consult the manufacturer).

## PROTOLON(FL)-LWL (N)TSFLCGEWOEU 8,7/15 kV: medium voltage flat reeling cable with fibre-optics



### Chemical parameters

Resistance to oil	Acc. to DIN EN 60811-404 and DIN VDE 0473-811-404, paragraph 10
Weather resistance	Unrestricted use outdoors and indoors, resistant to ozone, UV and moisture
Water resistance	Acc. to HD 2216

### Thermal parameters

Max. permissible temperature at conductor	90 °C
Max. short circuit temperature of the conductor	250 °C
Ambient temperature for fixed installation	min -50 °C ; max +80 °C
Ambient temperature in fully flexible operation	min -35 °C ; max +80 °C

### Mechanical parameters

Max. tensile load on the conductor	15 N/mm <sup>2</sup>
Torsional stress	Not allowed
Min. bending radius	Acc. to DIN VDE 0298, Part 3. (Recommendation: applied cable diameter D = 1.5 x height of the flat cable)
Min. distance with S-type directional changes	20 x D (cable diameter)
Travel speed	- Gantry (reeling operation): up to 120 m/min
Additional tests	Reversed bending test, reeling test



Number of cores x cross section	Part number	MLFB Number	Conductor diameter max. mm	Min. Height (for flat cable) mm	Max. Height (for flat cable) mm	Min. Width (for flat cable) mm	Max. Width (for flat cable) mm	Bending radius free moving min. mm	Weight (ca.) kg/km	Permissible tensile force max. N	Conductor resistance at 20°C max. Ω/km	Current carrying capacity, reeled in 1 layer (3) A	Short Circuit Current (conductor) kA
3x35+4x25/4E +1x(6G62,5)	20004696	SDK5435	8.3	29.3	32.3	96.9	101.9	485	4630	1575	0.57	138	5.01
3x50+4x25/4E +1x(6G62,5)	20168452	SDK5...	9.8	30	33	102.9	107.9	495	5400	2250	0.39	172	7.15
3x70+4x35/4E +1x(6G62,5)		SDK5...	11.4	31.7	33.7	109.7	114.7	506	6460	3150	0.28	212	10.01

(3) Nominal current carrying capacity for rubber cables reeled in 1 layer, at 30°C ambient temperature (see also technical annexes). Design with 12, 18 or 24 fibers and/or G50 or E9 types available upon request.